

PROTECTION PACK


OPTIPARTS
MARINE EQUIPMENT

Foto by: Matias Cappizzano

COMPLETE PACKAGE OF LASER® PROTECTION FOR:

- MASTSTEP
- TILLER
- CENTER BOARD
- MAST
- OUTHAUL

**PART NUMBER:
EX2001**

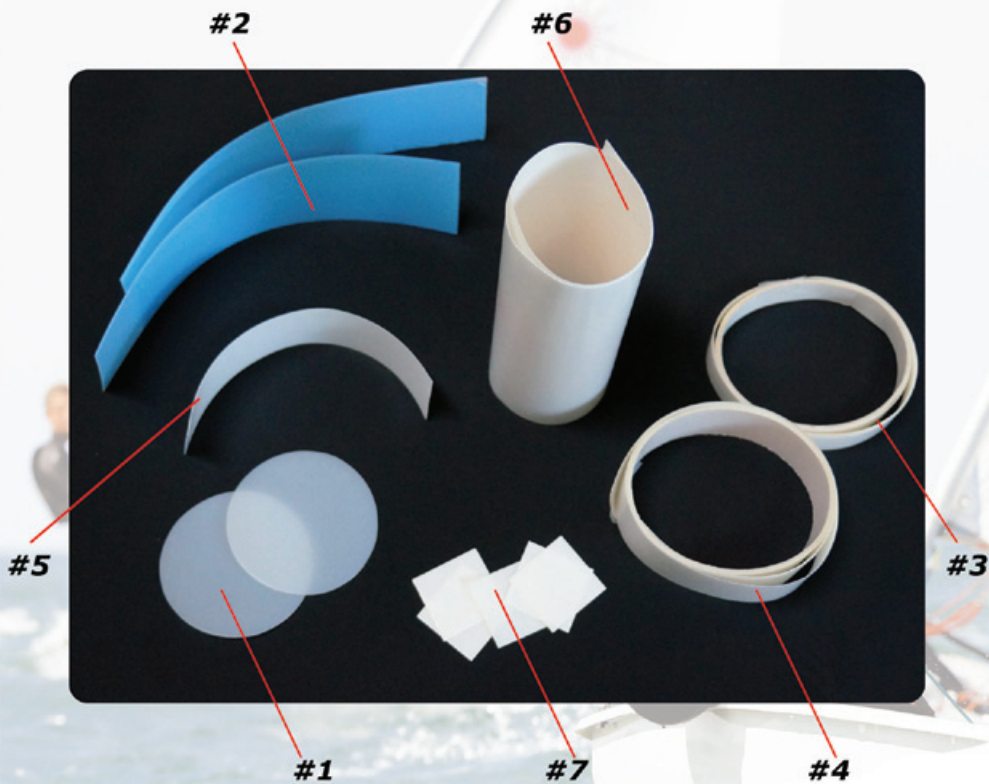

#1-Disk. The Disk should be placed at the bottom of the maststep, leaving the disk free to move. There are two pieces in case you lose one..

#2-Mast step and Deck. There are two identical stripes to be placed respectively at the lower end of the lower mast section and at the deck level not exceeding 10mm above deck level. Join on port or starboard side.

19. Mast (a) To prevent abrasion of the mast step, a tube or collar of uniform thickness not exceeding 1 mm may be placed around the entire circumference of the lower mast or the mast step cavity. The tube or collar shall not extend more than 10 mm above deck level. In addition, a disc of uniform thickness not exceeding 1mm in thickness may be placed in the bottom of the mast step.

#3 & 4 Snug fit of the upper section. These two strips are made to get rid of any gaps and flex in the joint between the upper and lower spar in the mast.

19. Mast (c) Tape or other bushing material may be applied to both the plastic end cap, the collar of the upper mast and the upper mast to ensure a snug fit. The tape or bushing material may only be used on that portion of the plastic parts that actually slide into the lower section and/or between the upper mast and the collar and it shall be a uniform thickness around the circumference. Taping or bushing material above the collar to fair the collar into the mast is prohibited.

#5 Tiller. The stripe must be applied crosswise on the deck to avoid the friction and finally wear and tear due to the tiller.

#6 Outhaul. The stripe must be applied lengthwise under the boom to minimize friction with the outhaul loop.

#7 Squares. You must apply the little squares in the top front corner of the centreboard case.

14. Centreboard (d) One layer in any material of maximum 2mm thickness and of a maximum size of 30mm x 30mm may be applied at the top front corner of the centreboard case.

Laser protection pack

This kit has been optimized by Laser® sailors and contains a large selection of ultra high molecular weight polyethylene tapes with an aggressive acrylic adhesive.

The result is a very tough material, with the highest impact strength of any thermoplastic presently made.

It has extremely low coefficient of friction, self-lubricating and highly resistant to abrasion (15 times more resistant to abrasion than steel) and offers an efficient solution to many wearing and tearing problems.

The box contains:

- | | | |
|----|-----------|---|
| #1 | 2 disks | ø65mm for the mast step |
| #2 | 2 stripes | 50mm wide for the mast step and mast deck |
| #3 | 1stripe | 17mm x 2m for snug fit on the top mast section |
| #4 | 1stripe | 30mm x 2m for snug fit on the top mast section |
| #5 | 1stripe | 34mm x150mm for the deck abrasion from the tiller |
| #6 | 1stripe | 150mm x 300mm for the out haul |
| #7 | 5 squares | 30mm x 30mm for the centre board. |

All tapes are fully compliant with the ILCA Class Rules

For questions regarding our products visit www.optiparts.com

